



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 25 FEB 2004

WIPO PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03016029.5

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY

Anmeldung Nr:

Application no.: 03016029.5 ✓

Demande no:

Anmeldetag:

Date of filing: 15.07.03 ✓

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

DEUTSCHE THOMSON-BRANDT GMBH  
Hermann-Schwer-Strasse 3  
78048 Villingen-Schwenningen  
ALLEMAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

method for describing the composition of audio signals

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04S3/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

PD020112A-Ri-140703

1

## Method for describing the composition of audio signals

The invention relates to a method for describing the composition of audio signals, especially for the spatialization of MPEG-4 encoded audio signals in a 3D domain.

The MPEG-4 Audio standard as defined in ISO/IEC 14496-3 and 14496-1 facilitates a wide variety of applications by supporting the representation of audio objects. For the combination of the audio objects additional information - the so-called scene description - determines the placement in space and time and is transmitted together with the coded audio objects.

A scene description is structured hierarchically and can be represented as a graph, wherein leaf-nodes of the graph form the separate objects and the other nodes describes the processing, e.g. positioning, scaling, effects. A node named "Sound" allows spatialization of the audio signal in a 3D domain. A further node with the name "Sound2D" only allows spatialization on a 2D screen. The use of the "Sound" node in a 2D graphical player is not specified due to different implementations of the properties in a 2D and 3D player.

The Sound2D node is defined as followed:

```

Sound2D {
  30   exposedField      SFFloat    intensity    1.0
      exposedField      SFVec2f    location      0,0
      exposedField      SFNode     source         NULL
      field             SFBool     spatialize     TRUE
}
35

```

and the Sound node is defined as followed:

PD020112A-Ri-140703

2

```

Sound {
    exposedField      SFVec3f    direction    0, 0, 1
    exposedField      SFFloat    intensity     1.0
5   exposedField      SFVec3f    location      0, 0, 0
    exposedField      SFFloat    maxBack       10.0
    exposedField      SFFloat    maxFront      10.0
    exposedField      SFFloat    minBack       1.0
    exposedField      SFFloat    minFront      1.0
10  exposedField      SFFloat    priority      0.0
    exposedField      SFNode     source        NULL
    field             SFBool     spatialize    TRUE
}

```

15 In the following the general term for all sound nodes  
(Sound2D, Sound and DirectiveSound) will be written in  
lower-case e.g. 'sound nodes'.

20 Please pay attention to the fact that the Sound node is ac-  
tually a 3D node.

In the simplest case the Sound or Sound2D node is connected  
via an AudioSource node to the decoder output. The sound  
nodes contain the *intensity* and the *location* information.

25 From the audio point of view a sound node is the final node  
before the loudspeaker mapping. In the case of several sound  
nodes, the output will be summed up. From the systems point  
of view the sound nodes can be seen as an entry point for  
the audio sub graph. A sound node can be grouped with non-

30 audio nodes into a Transform node that will set its original  
location.

With the *phaseGroup* field of the AudioSource node, it is  
possible to mark channels that contain important phase rela-

35 tions, like in the case of "stereo pair", "multichannel"  
etc. A mixed operation of phase related channels and non-

PD020112A-Ri-140703

3

phase related channels is allowed. A *spatialize* field in the sound nodes specifies whether the sound shall be spatialized or not. This is only true for channels, which are not member of a phase group.

5

The Sound2D can spatialize the sound on the 2D screen. The standard said that the sound should be spatialized on scene of size 2m x 1.5m in a distance of one meter. This explanation seems to be ineffective because the value of the location field is not restricted and therefore the sound can also be positioned outside the screen size. We suppose to remove the confusing description.

10

The Sound and DirectiveSound node can set the location everywhere in the 3D space. The mapping to the existing loud-speaker placement can be done using simple amplitude panning or more sophisticated techniques.

15

Both Sound and Sound2D can handle multichannel inputs and basically have the same functionalities, but the Sound2D node cannot *spatialize* a sound other than to the front.

20

From games, cinema and TV applications we know, that it makes sense to provide the end user with a fully spatialized "3D-Sound" presentation, even if the video presentation is limited to a small flat screen in front.

25

A first proposal is to add Sound and Sound2D to all scene graph profiles, i.e. add the Sound node to the SF2DNode group.

30

But, one reason for not including the "3D" sound nodes into the 2D scene graph profiles is, that a typical 2D player is not capable to handle 3D vectors (SFVec3f type), as it would be required for the Sound *direction* and *location* field.

35

PD020112A-Ri-140703

4

Another reason is that the Sound node is specially designed for virtual reality scenes with moving listening points and attenuation attributes for far distance sound objects. For this the Listening point node and the Sound *maxBack*, *max-*  
 5 *Front*, *minBack* and *minFront* fields are defined.

The proposal is to extend the old Sound2D node or to define a new Sound2Ddepth node. The Sound2Ddepth node should be similar the Sound2D node but with an additional *depth* field.

10

```
Sound2Ddepth {
    exposedField      SFFloat      intensity  1.0
    exposedField      SFVec2f      location    0,0
    exposedField      SFFloat      depth       0.0
15    exposedField      SFNode       source      NULL
    field             SFBool       spatialize  TRUE
}
```

The *intensity* field adjusts the loudness of the sound. Its  
 20 value ranges from 0.0 to 1.0, and this value specifies a factor that is used during the playback of the sound

The *location* field specifies the location of the sound in the 2D scene.

25

The *depth* field specifies the depth of the sound in the 2D scene using the same coordinate system than the *location* field. The default value is 0.0 and it refers to the screen position.

30

The *spatialize* field specifies whether the sound shall be spatialized. If this flag is set, the sound shall be spatialized with the maximum sophistication possible.

35 The same rules for multichannel audio spatialization apply to the Sound2Ddepth node as to the Sound (3D) node.

PD020112A-R1-140703

5

Using the Sound2D node in a 2D scene allows presenting surround sound, as the author recorded it. It is not possible to spatialize a sound other than to the front. Spatialize  
5 means moving the location of a monophonic signal due to user interactivities or scene updates.

With the new proposal of a Sound2Ddepth node it is possible to spatialize a sound also in the back, at the side or above  
10 of the listener. Supposing the audio presentation system has the capability to present it.

The invention allows the spatialization of the audio signal in a 3D domain, even if the player is restricted to 2D  
15 graphics.

A further embodiment is as follows:

20 The audio nodes 'Sound', 'Sound2D' and 'directiveSound' described in the MPEG-4 audio standard have besides the functionality to present phase-related multichannel signals (>1channel), the functionality to present accumulated monophonic sounds everywhere in the 2D or 3D space. Their position  
25 in these spaces can be addressed by using the 'location'-field of these nodes. The location is a 2D- or 3D-vector. If the 'spatialize'-field of these nodes is set to 'true', the sound will be spatialized depending on the 'location'. For the spatialization process different algorithms  
30 can be used, for example the amplitude panning.

With these techniques it is only possible to position a sound as a point sound source. The sound has no 'width'.

Different methods are actually discussed to position a sound  
35 in a virtual reality world space, with a noticeable width. The approach of these algorithms is to describe a size or a

PD020112A-Ri-140703

6

shape in a 3D coordinate system.

There has been no approach for a user-oriented system. The following solution is to insert two new fields into the Sound and Sound2D nodes to control the width of the sound with an opening-angle relative to the listener. The angle has a vertical and a horizontal component, 'widthHorizontal' and 'widthVertical', ranging from  $0...2\pi$  with the location as its center. The widthHorizontal is shown in Fig. 3. The widthVertical is similar to this with a 90 degree x-y-rotated relation.

The width of a sound can be generated for example as described in DE - A - 196 32 734 'methods and apparatus for generating a multichannel signal from a mono signal'.

An application is for example the monophonic transmission of the violins in an orchestra instead its transmission as stereo signals, coupled to a fixed loudspeaker layout and no possibility to position it at a desired location.

According to a further embodiment a mapping of the coordinates is performed. An additional field dimensionMapping in the Sound2DDepth node defines a transformation, e.g. as a 2 rows x 3 columns Vector used to map the 2D context coordinate-system (ccs) from the ancestor's transform hierarchy to the origin of the node.

The node's coordinate system (ncs) will be calculated as follows:

$$ncs = ccs \times dimensionMapping.$$

The location of the node is a 3 dimensional position, merged from the 2D input vector location and depth {location.x location.y depth} with regard to ncs.

Example: The node's coordinate system context is  $\{x_1, y_1\}$ . dimensionMapping is  $\{1, 0, 0, 0, 0, 1\}$ . This leads to



PD020112A-Ri-140703

7

$n_{cs} = \{x_i, 0, y_i\}$ , what enables the movement of an object in the  $y$ -dimension to be mapped to the audio movement in the depth.

- 5 The field 'dimensionMapping' may be defined as MFFloat. The same functionality could also be achieved by using the field data type 'SPRotation' that is an other MPEG-4 data type.

PD020112A-Ri-140703

8

Claims

1. Method for describing the composition of audio signals,  
which are encoded as separate audio objects, wherein  
5 the arrangement and the processing of the audio objects  
in a sound scene is described by nodes arranged hierar-  
chically in a scene description, wherein a node allows  
spatialization on a 2D screen using a 2D vector,  
characterized by describing a 3D position of an audio  
10 object using said 2D vector and a 1D value describing  
the depth of said audio object.
2. Method according to claim 1, characterized by  
controlling the width of an audio object by using two  
15 additional fields inserted into the Sound and Sound2D  
nodes describing an opening-angle relative to the lis-  
tener.

PD020112-Ri-021202

9

Abstract

Method for describing the composition of audio signals,  
5 which are encoded as separate audio objects. The arrangement  
and the processing of the audio objects in a sound scene is  
described by nodes arranged hierarchically in a scene de-  
scription. A node specified only for spatialization on a 2D  
screen using a 2D vector describes a 3D position of an audio  
10 object using said 2D vector and a 1D value describing the  
depth of said audio object.

In a further embodiment two new fields are inserted into the  
Sound and Sound2D nodes to control the width of the sound  
15 with an opening-angle relative to the listener.

Fig. 1



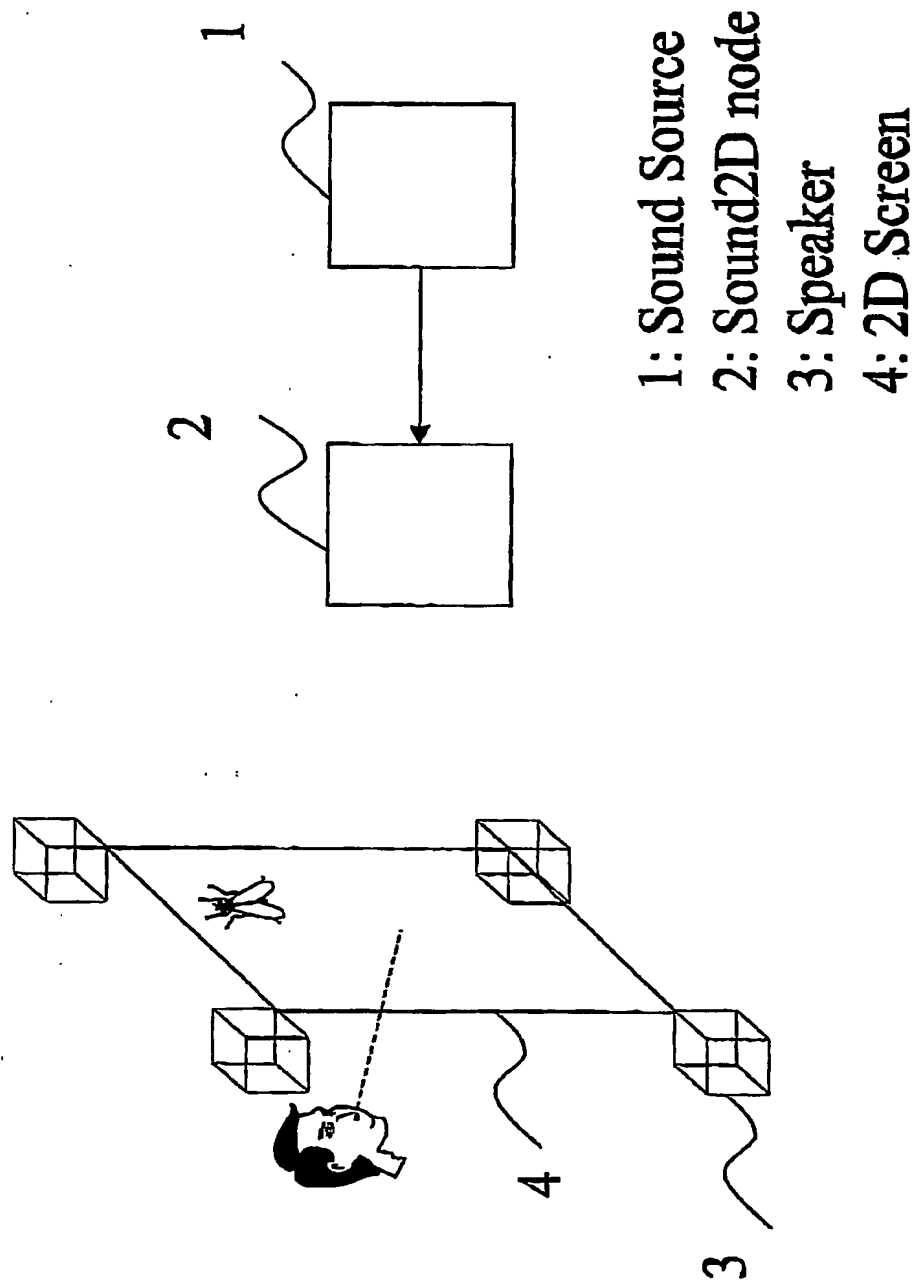


Fig. 2

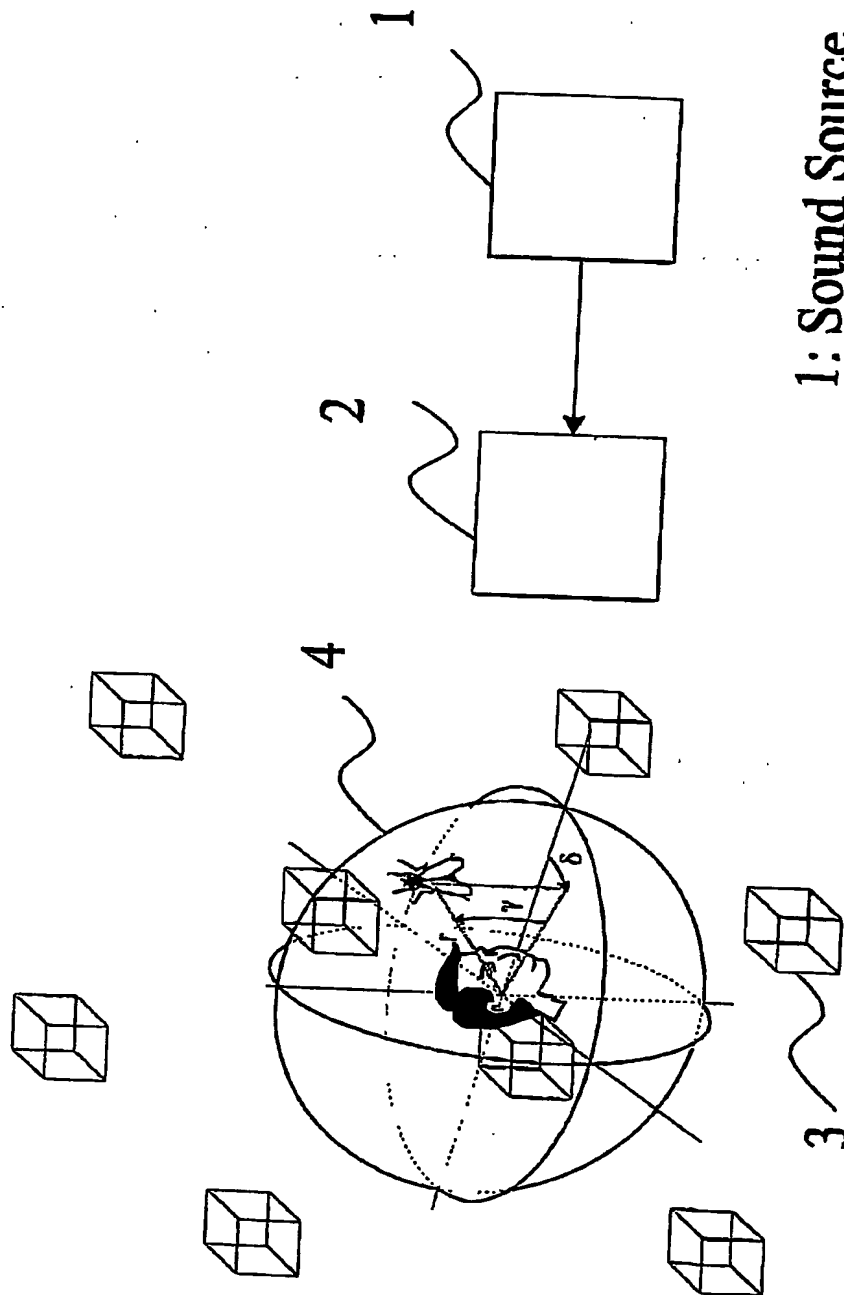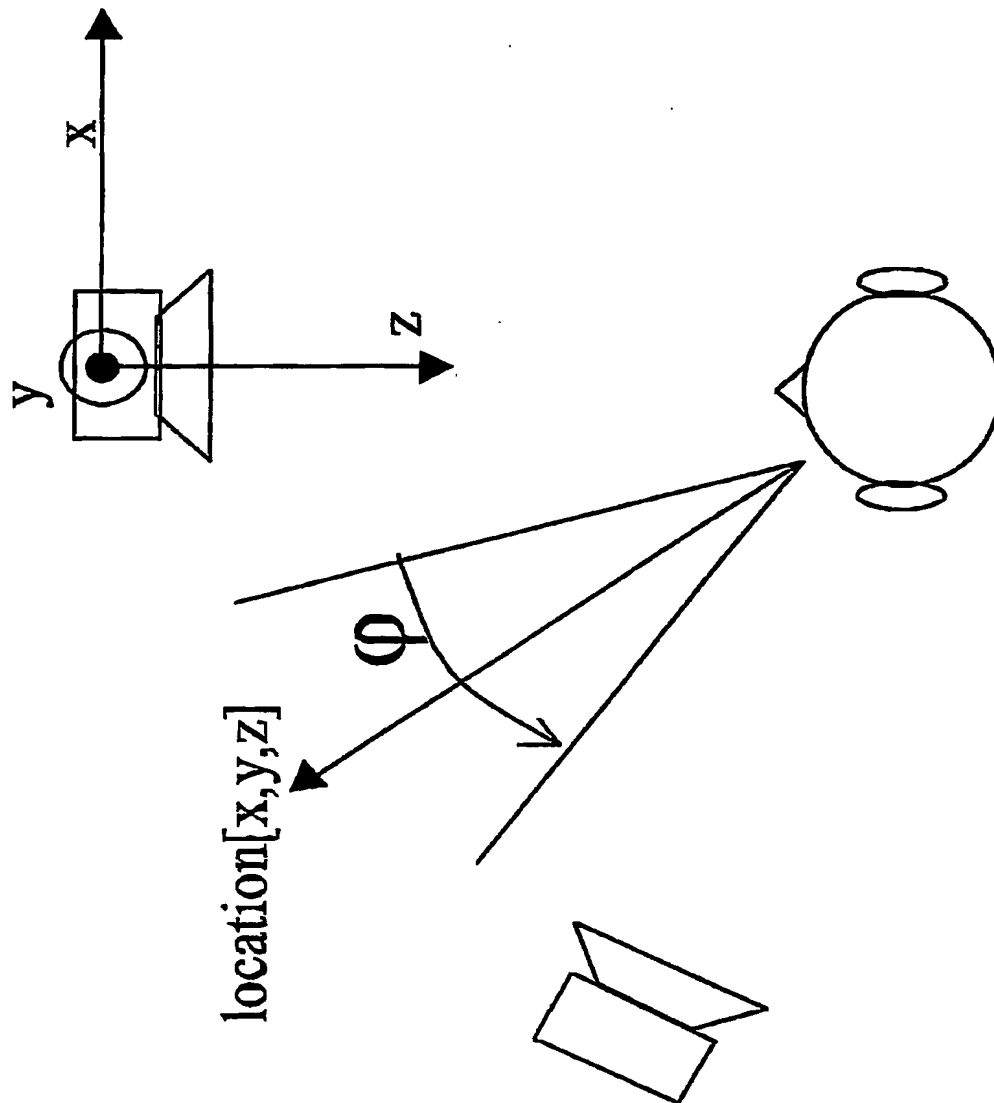

- 1: Sound Source
- 2: Sound2Ddepth node
- 3: Speaker
- 4: 3D Sound Reproduction



**Fig. 3:** Definition of the 'widthHorizontal' with the location as its center.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**